





Stainless Steel Defeater L-Handle Latches

| Part Number | Description | Key Part No. | Material | Finish | Shaft Length | Shaft Style | Shaft Size | Mounting |
|---------------------|---------------------------|----------------------------------|----------|------------|--------------|-------------|------------|----------|
| 3951SST | slotted plug | no key | 316SS | passivated | 1.52 [38.7] | threaded | .312 [7.9] | blind |
| 3954SST | 3MM double bitted | 4-14K | | | | | | |
| 3950SST* | non-locking | no key | 316SS | passivated | 1.52 [38.7] | threaded | .312 [7.9] | blind |
| 3950SST-333 | key locking | Key Code 333 (2 keys included) | 316SS | passivated | 1.52 [38.7] | threaded | .312 [7.9] | blind |
| 3950SST-751 | key locking | Key Code CH751 (2 keys included) | | | | | | |
| 3955SST-333* | key locking, non-defeater | Key Code 333 (2 keys included) | 316SS | passivated | 1.52 [38.7] | threaded | .312 [7.9] | blind |

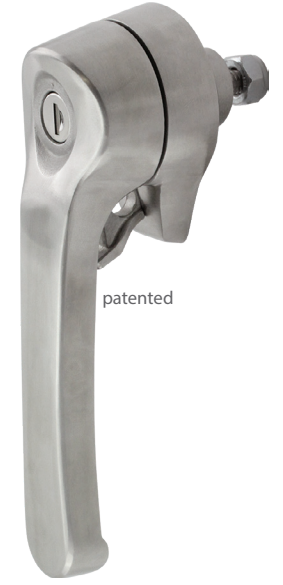

- ▶ spring loaded plug makes this a defeater handle requiring both hands to operate
- ▶ *part no. **3950SST** & **3955SST-333** are non-defeater handles
- ▶ handle 90° rotation is adjustable by repositioning the stop washer on the rear of the handle
- ▶ threaded shafts have an M10 x 1.5 thread
- ▶ trigger has (2) holes: large hole accepts a 3/8" standard padlock shackle and 1/4" padlock shackle on the smaller hole
- ▶ sealing gasket is built into the escutcheon
- ▶ intended for NEMA type 4X enclosure requirements
- ▶ cams sold separately, see page 128 for cams and grip dimension

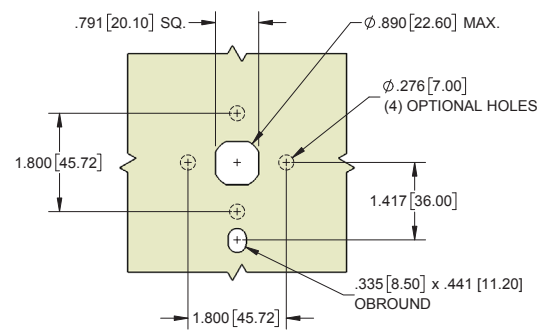

MOUNTING DIMENSIONS

