

STAINLESS STEEL DEFEATER L-HANDLE LATCHES



HIGHLIGHTS / FEATURES


- 316SS material with passivated finish.
- Defeater version(s) are equipped with built-in spring loaded insert for two handed security operation; non-defeater version(s) also available.
- Available in keyed and tool operated inserts, also with non-locking style.
- Handle 90° rotation is adjustable for CW or CCW operation by repositioning the cover on the rear of the handle.
- Dual Hole Trigger permits the use of 1/4" to 3/8" diameter padlocks to restrict access.
- Intended for NEMA type 4X enclosure requirements.
- Foam-in-place sealing gasket built into the escutcheon.

APPLICATION

NEMA 4X ENCLOSURES



TECHNICAL DETAILS

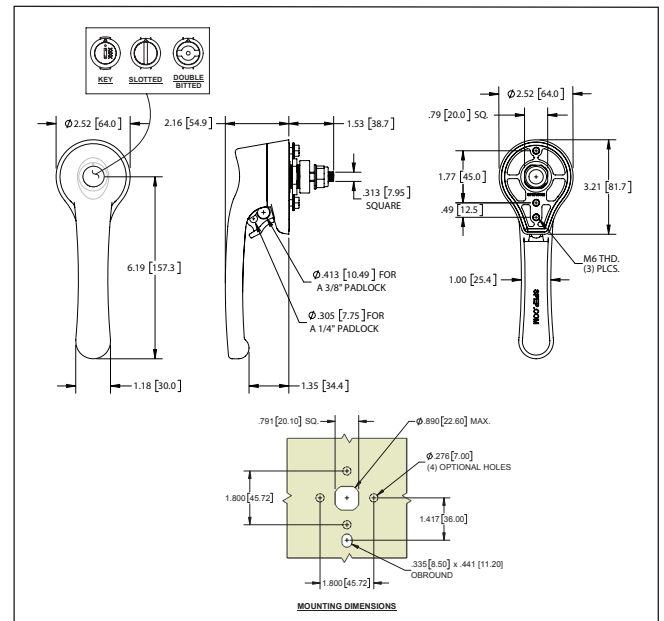

Part No.	Description	Key Code	Mounting	Shaft Style	Shaft Length	Shaft Size
3951SST	slotted plug	no key	blind	threaded	1.52 [38.7]	.313 [7.95]
3954SST	3MM double bitted plug	no key				
3950SST	non-locking	no key				
3950SST-333	key locking	key code 333 (includes 2 keys)				
3955SST-333	key locking non-defeater	key code 333 (includes 2 keys)				