






Small Sealed Compression Lever Latches

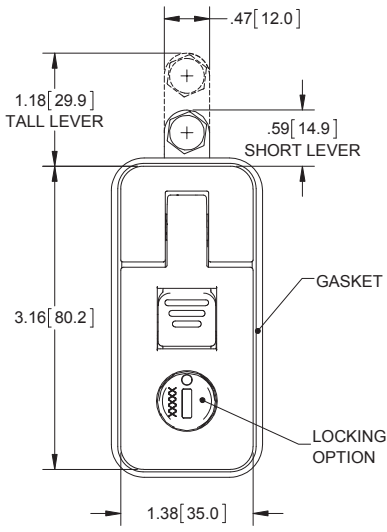

FRONT VIEW

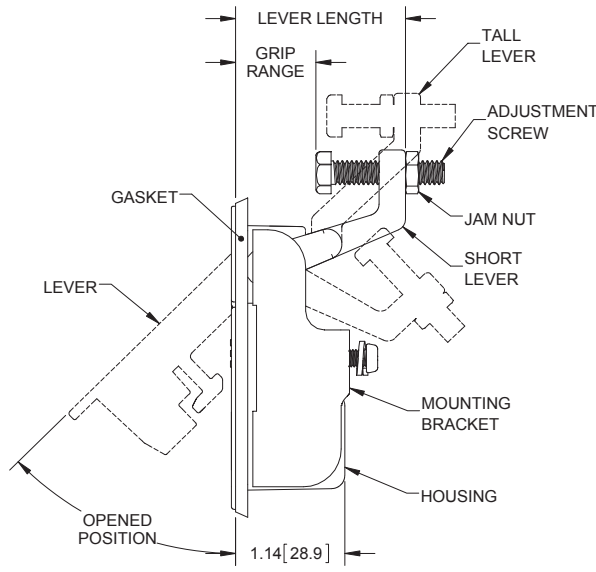

RIGHT SIDE VIEW

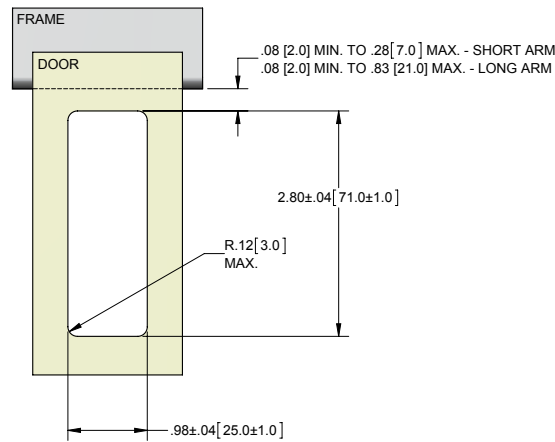

MOUNTING DIMENSIONS



locking

patented



non-locking

Features

- ▶ includes:
 - ▶ gasket
 - ▶ dust shutter
 - ▶ (2) ringed keys
- ▶ die cast zinc
- ▶ spring loaded lever
- ▶ low profile
- ▶ achieve NEMA 4/ IP65 when installed with optional gasket and supplied mounting screw
- ▶ for a door thickness of .24 [6.0] to .43 [11.0] use spare mounting screw available as part no. **XF154**

Small Sealed Compression Lever Latches

Matte Black	Lock Key Code	Description	Grip Range	Door Thickness
9-15BK01	non-locking			
9-16BK01	CH751	short arm	.47 [12.0] to 1.08 [27.0] (1.70 [43.0] Lever Length)	.04 [1.0] to .24 [6.0]
9-16BK11	CH545			
9-15BK02	non-locking			
9-16BK02	CH751	long arm	.59 [15.0] to 1.25 [31.0] (1.85 [47.0] Lever Length)	.04 [1.0] to .24 [6.0]
9-16BK12	CH545			
9-15BK03	non-locking			
9-16BK03	CH751	short arm	0.0 [0.0] to 1.08 [27.0] (1.70 [43.0] Lever Length)	.04 [1.0] to .24 [6.0]
9-16BK13	CH545			