

Continuous Hinges with Holes

Stainless Steel Continuous Hinges with Holes




302/304SS - Hand Polished - Drilled Countersunk Holes

| Part Number | Material Thickness | Open Width | Pin Diameter | Knuckle Length | Hole Size | Length | Notes |
|-------------|--------------------|------------|--------------|----------------|--|--------|--|
| MSS410 | .040 | 1.06 | .091 | .50 | Ø.181 hole countersunk for a #5 F.H.S. | 72.00 | <ul style="list-style-type: none">▶ 302/304SS leaves and pin▶ pin securely staked in place▶ deeply drilled countersunk holes on 2.00" centers▶ top side and knuckle polished to a high luster▶ packaged to prevent scratching in transit |
| MSS412 | .040 | 1.25 | .091 | .50 | | | |
| MSS415 | .040 | 1.50 | .091 | .50 | Ø.211 hole countersunk for a #6 F.H.S. | | |
| MSS420 | .040 | 2.00 | .091 | .50 | | | |
| MSS615 | .060 | 1.50 | .120 | .50 | Ø.181 hole countersunk for a #6 F.H.S. | | |
| MSS620 | .060 | 2.00 | .120 | .50 | | | |
| MSS630 | .060 | 3.00 | .120 | .50 | | | |

302/304SS - Mill - Drilled Countersunk Holes

| Part Number | Material Thickness | Open Width | Pin Diameter | Knuckle Length | Hole Size | Length | Notes |
|-------------|--------------------|------------|--------------|----------------|--|--------|--|
| MSS410M ‡ | .040 | 1.06 | .091 | .50 | Ø.181 hole countersunk for a #5 F.H.S | 72.00 | ▶ all details as above, except these hinges are mill finish (not polished or degreased). |
| MSS412M | .040 | 1.25 | .091 | .50 | | | |
| MSS415M | .040 | 1.50 | .091 | .50 | Ø.211 hole countersunk for a #6 F.H.S. | | |
| MSS420M | .040 | 2.00 | .091 | .50 | | | |
| MSS615M | .060 | 1.50 | .120 | .50 | Ø.181 hole countersunk for a #6 F.H.S. | | |
| MSS620M | .060 | 2.00 | .120 | .50 | | | |
| MSS630M ‡ | .060 | 3.00 | .120 | .50 | | | |

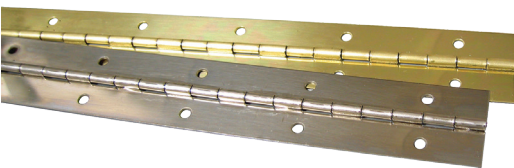

Premium Finish Steel Continuous Hinges with Countersunk Holes

| Part Numbers | | | | Screw Size | Finish |
|--------------|-------------|-------------|-------------|------------|------------------------------|
| Open Widths | | | | | |
| 1.06" | 1.25" | 1.50" | 2.00" | | |
| NPSL41094 | NPSL41294 | NPSL41594 | NPSL42094 | #4 | NICKEL PREMIUM GRADE |
| | NPSL41295 | NPSL41595 | NPSL42095 | #5 | ▶ top side high luster |
| | | NPSL41596 | NPSL42096 | #6 | ▶ bottom side dull |
| | | | | | ▶ both sides lacquered |
| BPSL41094 | BPSL41294 ‡ | BPSL41594 ‡ | BPSL42094 ‡ | #4 | BRASS, PREMIUM GRADE, BRIGHT |
| | BPSL41295 | BPSL41595 ‡ | BPSL42095 | #5 | ▶ top side high luster |
| | | BPSL41596 ‡ | BPSL42096 ‡ | #6 | ▶ bottom side satin |
| | | | | | ▶ both sides lacquered |

- ▶ leaf thickness .040", pre-plated cold rolled steel
- ▶ pin diameter .091", galvanized pin staked in place
- ▶ knuckle length .50"

- ▶ stock lengths shown are 72.00" long
- ▶ coined countersunk holes on 2.00" centers for flat head screws
- ‡ these hinges are non-stock