




Small Black L-Handles with 3-Point Cam

Handles

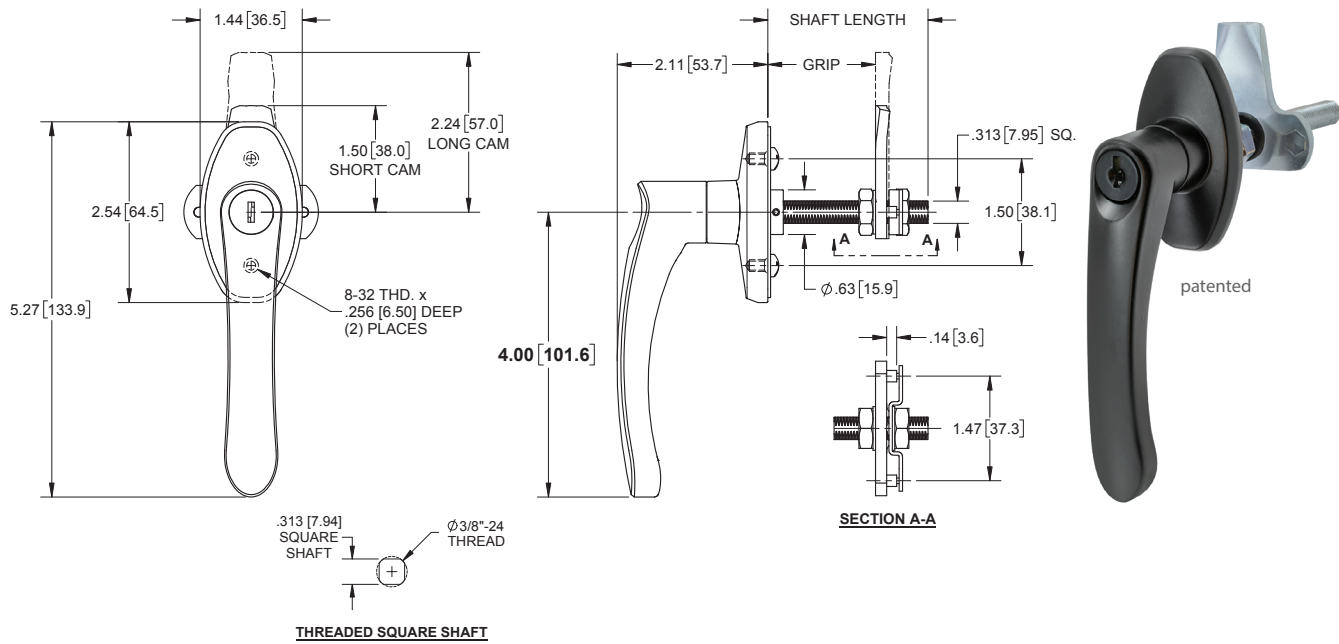

patented

SECTION A-A

THREADED SQUARE SHAFT

Part Number	Cam Type	Shaft Length	Grip	Rotation	Key Code
35BK-01	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
35BK-01L	long				
35BK-02	short	1.75 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CW	non-locking
35BK-02L	long				
35BK-03	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
35BK-03L	long				
36BK-01	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
36BK-01L	long				
36BK-02	short	1.75 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CW	CH751
36BK-02L	long				
36BK-03	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
36BK-03L	long				
35BK-04	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
35BK-04L	long				
35BK-05	short	1.74 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CC	non-locking
35BK-05L	long				
35BK-06	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
35BK-06L	long				
36BK-04	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
36BK-04L	long				
36BK-05	short	1.75 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CC	CH751
36BK-05L	long				
36BK-06	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
36BK-06L	long				

- ▶ material: die cast zinc
- ▶ meets ADA requirements
- ▶ locking handles include (2) ringed keys
- ▶ handles are blind-mount and include (2) 8-32 x .25 [6.4] long mounting screws
- ▶ all handles include: cam, cam cover, poron gasket, (2) jam nuts, (2) mounting screws, and (2) lock washers
- ▶ may be used with part number **723** rod, pg. 63
- ▶ see accessories starting on pg. 58